


RUBBER GASKETS

Flat ring & full face

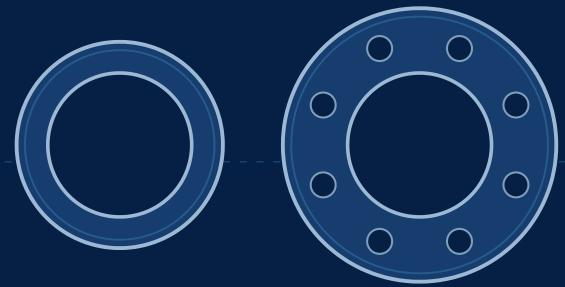

FLAT RING

FULL FACE

Profile illustrations only • not to scale

Superior Conveyors supplies and fabricates flat ring and full face rubber gaskets suitable for a wide range of industrial sealing applications. Gaskets can be manufactured to recognised Australian and International flange standards, or custom requirements.

FLANGE STANDARDS

AS 4087	PN10, PN16
AS 2129	Tables D and E
BS 3063	
BS 4865	
ANSI B16.21	Class 150
DIN 2690	

MATERIALS

Natural Rubber	Up to 2,000 mm OD
Nitrile Rubber	Up to 1,000 mm OD
- Nylon fabric insertion	
- Cotton fabric insertion	
EPDM Rubber	Up to 1,000 mm OD

OD = outside diameter.

TYPICAL THICKNESS

Multiple thicknesses

3–12 mm

TYPICAL SHORE A HARDNESS

Various hardness grades

40–60 duro

SUITABLE FOR LOW &
MEDIUM PRESSURE SERVICES

• Water • Slurry • Air

CUSTOM MANUFACTURE

For gaskets outside the above specifications, we can manufacture **custom sizes, non-standard profiles** including square, rectangular and radius corner, and **special drilling patterns** when the pitch circle diameter (PCD) or number of holes differ.

OTHER MANUFACTURED PRODUCTS

Rubber strips • Mudguards • Load mats
Rubber chutes • Straight socks • Gob socks

REQUEST A QUOTE

admin@superiorconveyors.com.au

0417 363 878

SUPERIOR CONVEYORS PTY LTD

45–47 Centurion Drive
Paget QLD 4740

www.superiorconveyors.com.au