


DRIVE PULLEY | REFERENCE DIMENSIONS

B 400–1200 MM · ALL DIMENSIONS IN mm

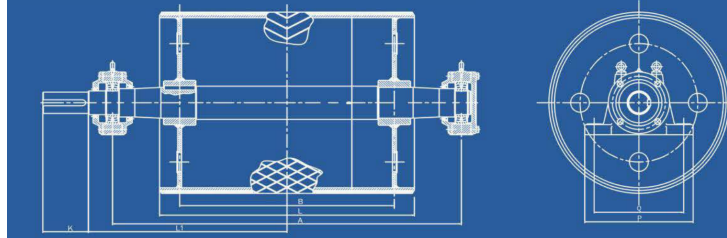


B	D	A	L	L1	K	M	N	Q	P	BEARING TYPE
400	400	750	500	450	110	70	-	280	340	22212
500	400	850	600	495	110	70	-	280	340	22212
500	500	850	600	495	140	70	-	350	410	22216
650	400	1000	750	570	110	70	-	280	340	22212
650	500	1000	750	590	170	80	-	380	460	22220
650	630	1000	750	590	170	80	-	380	460	22220
800	400	1300	950	720	110	70	-	280	340	22212
800	500	1300	950	740	170	80	-	380	460	22220
800	630	1300	950	750	250	120	-	480	570	22228
800	800	1400	950	800	250	200	105	520	640	22232
800	1000	1450	950	895	350	300	150	720	880	22244
800	1250	1450	950	925	410	320	170	840	1000	24156
1000	400	1500	1150	820	140	70	-	350	410	22216
1000	500	1500	1150	840	170	80	-	380	460	22220
1000	630	1500	1150	840	210	110	-	440	530	22224
1000	800	1600	1150	995	350	255	140	640	780	23240
1000	1000	1650	1150	1000	350	270	140	720	880	23244
1000	1250	1650	1150	1025	410	320	170	720	1000	24156
1000	1400	1650	1150	1025	470	320	170	940	1150	23160
1000	1600	1800	1150	1175	470	470	260	1010	1200	23268
1200	500	1750	1400	965	170	80	-	380	460	22220
1200	630	1750	1400	975	250	120	-	480	570	22228
1200	800	1750	1400	1120	350	255	140	640	780	23240
1200	1000	1900	1400	1150	350	300	150	750	900	23248
1200	1250	1900	1400	1150	470	320	170	940	1150	23160
1200	1400	2050	1400	1300	470	470	260	1010	1200	23268
1200	1600	2050	1400	1300	470	470	260	1010	1200	23268

Reference dimensions and bearing designations are retained as supplied. Confirm the complete configuration against an approved drawing before manufacture or installation.

DRIVE PULLEY | REFERENCE DIMENSIONS

B 1400–2400 MM • ALL DIMENSIONS IN mm

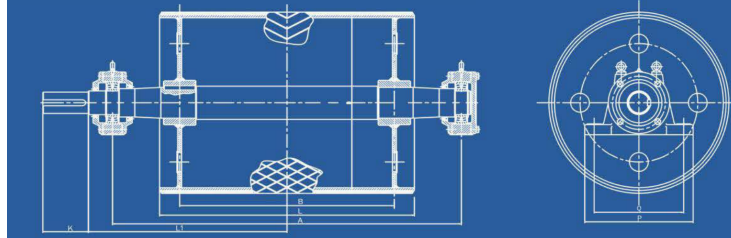


B	D	A	L	L1	K	M	N	Q	P	BEARING TYPE
1400	800	2100	1600	1220	350	270	140	720	880	23244
1400	1000	2100	1600	1250	350	300	150	750	900	23248
1400	1250	2100	1600	1260	470	320	170	940	1150	23160
1400	1400	2250	1600	1400	470	470	260	1010	1200	23268
1400	1600	2250	1600	1400	470	470	260	1010	1200	23268
1600	800	2350	1800	1375	350	300	150	750	900	23248
1600	1000	2350	1800	1385	410	320	170	840	1000	24156
1600	1250	2350	1800	1385	470	320	170	940	1150	23160
1600	1400	2450	1800	1500	470	470	260	1010	1200	23268
1600	1600	2450	1800	1500	470	470	260	1010	1200	23268
1800	800	2550	2000	1475	350	300	150	750	900	23248
1800	1000	2550	2000	1485	410	320	170	840	1000	24156
1800	1250	2550	2000	1485	470	320	170	940	1150	23160
1800	1400	2650	2000	1600	470	470	260	1010	1200	23268
1800	1600	2650	2000	1600	470	470	260	1010	1200	23268
2000	800	2750	2200	1575	350	300	150	750	900	23248
2000	1000	2750	2200	1585	410	320	170	840	1000	24156
2000	1250	2750	2200	1585	470	320	170	940	1150	23160
2000	1400	2850	2200	1700	470	470	260	1010	1200	23268
2000	1600	2850	2200	1700	470	470	260	1010	1200	23268
2200	800	3050	2500	1725	350	300	150	750	900	23248
2200	1000	3050	2500	1735	470	320	170	940	1150	23160
2200	1250	3150	2500	1850	470	470	260	1010	1200	23268
2200	1400	3200	2500	1885	470	485	260	1050	1240	23272
2200	1600	3200	2500	1885	470	485	260	1050	1240	23272
2400	800	3350	2800	1875	350	300	150	750	900	23248
2400	1000	3350	2800	1885	470	320	170	940	1150	23160
2400	1250	3450	2800	2000	470	470	260	1010	1200	23268
2400	1400	3500	2800	2035	470	485	260	1050	1240	23272
2400	1600	3500	2800	2035	470	485	260	1050	1240	23272
2400	1800	3500	2800	2035	470	485	260	1050	1240	23272

Reference dimensions and bearing designations are retained as supplied. Confirm the complete configuration against an approved drawing before manufacture or installation.

TAIL / BEND PULLEY | REFERENCE DIMENSIONS

B 400–1200 MM · ALL DIMENSIONS IN mm

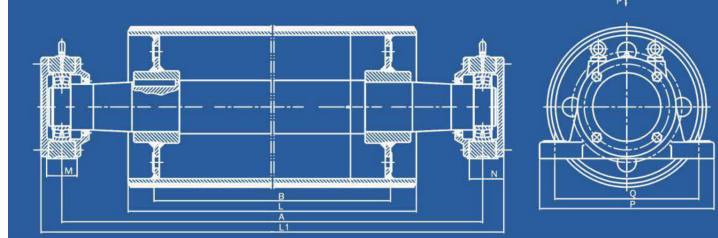


B	D	A	L	L1	Q	P	M	N	BEARING TYPE
400	400	750	500	860	280	340	70	-	22212
500	400	850	600	960	280	340	70	-	22212
500	500	850	600	965	350	410	70	-	22216
650	400	1000	750	1139	380	460	80	-	22220
650	500	1000	750	1139	380	460	80	-	22220
650	630	1050	750	1201	440	530	110	-	22224
800	400	1300	950	1423	440	530	110	-	22224
800	500	1300	950	1433	480	570	120	-	22228
800	630	1400	950	1550	520	640	200	105	22232
800	800	1400	950	1566	570	700	220	120	22236
800	1000	1400	950	1644	640	780	255	140	23240
800	1250	1450	950	1740	750	900	320	170	24152
1000	400	1500	1150	1623	440	530	110	-	22224
1000	500	1500	1150	1633	480	570	120	-	22228
1000	630	1600	1150	1750	520	640	200	105	22232
1000	800	1650	1150	1894	640	780	255	140	23240
1000	1000	1650	1150	1894	720	880	270	140	23244
1000	1250	1650	1150	1940	750	900	320	170	24152
1000	1400	1650	1150	1940	840	1000	320	170	24156
1000	1600	1650	1150	1940	940	1150	320	170	23160
1200	400	1750	1400	1873	440	530	110	-	22224
1200	500	1750	1400	1883	480	570	120	-	22228
1200	630	1850	1400	2000	520	640	200	105	22232
1200	800	1900	1400	2144	640	780	255	140	23240
1200	1000	1900	1400	2184	750	900	300	150	23248
1200	1250	1900	1400	2190	840	1000	320	170	24156
1200	1400	2050	1400	2500	1010	1200	470	260	23268
1200	1600	2050	1400	2500	1010	1200	470	260	23268

Reference dimensions and bearing designations are retained as supplied. Confirm the complete configuration against an approved drawing before manufacture or installation.

TAIL / BEND PULLEY | REFERENCE DIMENSIONS

B 1400–1800 MM · ALL DIMENSIONS IN mm

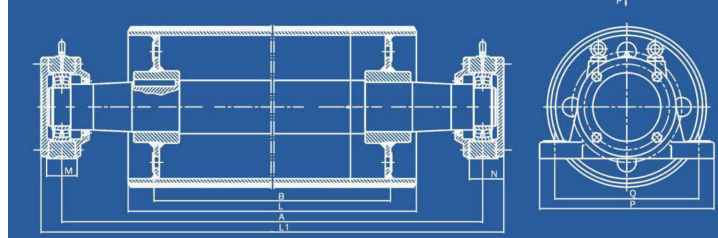


B	D	A	L	L1	Q	P	M	N	BEARING TYPE
1400	400	1950	1600	2073	440	530	110	-	22224
1400	500	2050	1600	2183	480	570	120	-	22228
1400	630	2050	1600	2200	520	640	200	105	22232
1400	800	2100	1600	2344	720	880	270	140	23244
1400	1000	2100	1600	2390	750	900	320	170	24152
1400	1250	2250	1600	2700	1010	1200	470	260	23268
1400	1400	2250	1600	2700	1010	1200	470	260	23268
1400	1600	2250	1600	2726	1050	1240	485	260	23272
1600	400	2250	1800	2383	480	570	120	-	22228
1600	500	2250	1800	2400	520	640	200	105	22232
1600	630	2300	1800	2466	570	700	220	120	22236
1600	800	2350	1800	2634	750	900	300	150	23248
1600	1000	2350	1800	2640	840	1000	320	170	24156
1600	1250	2450	1800	2900	1010	1200	470	260	23268
1600	1400	2450	1800	2900	1010	1200	470	260	23268
1600	1600	2450	1800	2926	1050	1240	485	260	23272
1800	400	2450	2000	2583	480	570	120	-	22228
1800	500	2450	2000	2600	520	640	200	105	22232
1800	630	2500	2000	2744	640	780	255	140	23240
1800	800	2550	2000	2840	750	900	320	170	24152
1800	1000	2550	2000	2840	840	1000	320	170	23156
1800	1250	2650	2000	3100	1010	1200	470	260	23268
1800	1400	2650	2000	3126	1050	1240	485	260	23272
1800	1600	2650	2000	3126	1050	1240	485	260	23272

Reference dimensions and bearing designations are retained as supplied. Confirm the complete configuration against an approved drawing before manufacture or installation.

TAIL / BEND PULLEY | REFERENCE DIMENSIONS

B 2000–2400 MM · ALL DIMENSIONS IN mm

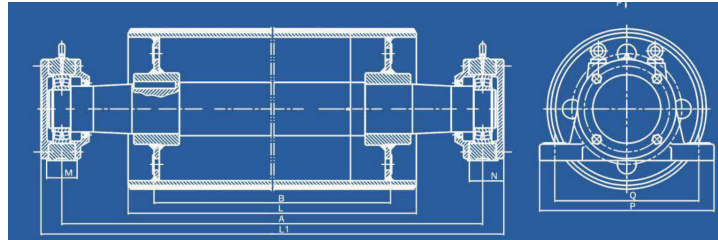

B	D	A	L	L1	Q	P	M	N	BEARING TYPE
2000	400	2650	2200	2783	480	570	120	-	22228
2000	500	2650	2200	2800	520	640	200	105	22232
2000	630	2700	2200	2944	640	780	255	140	23240
2000	800	2750	2200	3040	750	900	320	170	24152
2000	1000	2750	2200	3040	840	1000	320	170	23156
2000	1250	2850	2200	3300	1010	1200	470	260	23268
2000	1400	2850	2200	3326	1050	1240	485	260	23272
2000	1600	2850	2200	3334	1090	1280	500	280	23276
2200	500	2950	2500	3100	520	640	200	105	22232
2200	630	3000	2500	3244	640	780	255	140	23240
2200	800	3050	2500	3340	750	900	320	170	24152
2200	1000	3150	2500	3600	1010	1200	470	260	23268
2200	1250	3150	2500	3600	1050	1240	485	260	23272
2200	1400	3150	2500	3600	1090	1280	430	240	23276
2200	1600	3150	2500	3600	1090	1280	430	240	23276
2400	500	3250	2800	3416	570	700	220	120	22236
2400	630	3300	2800	3544	720	880	270	140	23244
2400	800	3350	2800	3640	750	900	320	170	24152
2400	1000	3450	2800	3900	1010	1200	470	260	23268
2400	1250	3450	2800	3926	1050	1240	485	260	23272
2400	1400	3450	2800	3934	1090	1280	430	240	23276
2400	1600	3450	2800	3934	1090	1280	430	240	23276
2400	1800	3450	2800	3934	1090	1280	430	240	23276

Reference dimensions and bearing designations are retained as supplied. Confirm the complete configuration against an approved drawing before manufacture or installation.

PULLEY ENQUIRY FORM

Complete the relevant fields and return this form with any supporting drawing or specification. All dimensions are in millimetres unless stated otherwise.

EMAIL

TELEPHONE

CUSTOMER ID

DELIVERY TIME

ADDRESS


JOB NUMBER

WEBSITE

COMPANY / CONTACT

☐ Drive pulley

☐ Non-drive pulley

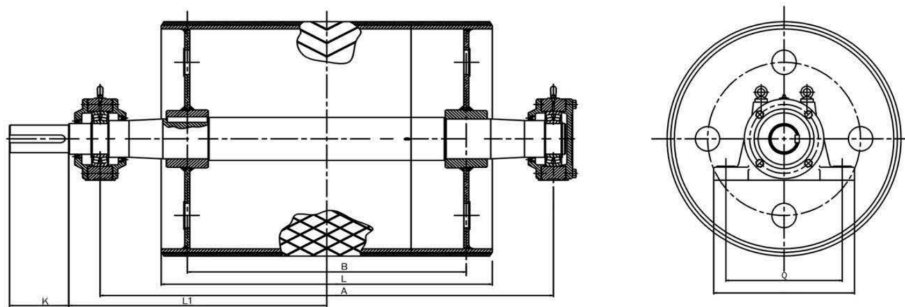

ENQUIRY DIMENSIONS

B	D	A	L	L1	K	Q	BEARING TYPE	BEARING SEAT MODEL

NOTES